## REVERSE VIEW OF PICKUPS, SWITCH AND POTENTIOMETERS.



MANUFACTURED IN ENGLAND BY NSF CONTROLS LTD

## Notes:-

(Sleeve)


Positions 1, 2 & 3 select Neck/Neck&Bridge/Bridge Humbuckers (unaffected by the P/P Pot)..

Positions 4, 5 & 6 voice either the slug coils or the screw coils depending on the P/P pot (down = slug coils, up = screw coils).

'Link' wires would normally be connected for series humbucker operation (typically these are North & South finish wires).

The pickup colour coding shown in this diagram does not represent any particular pickup manufacturer - please follow designations.

## FRONT VIEW OF PICKUPS AND SWITCH

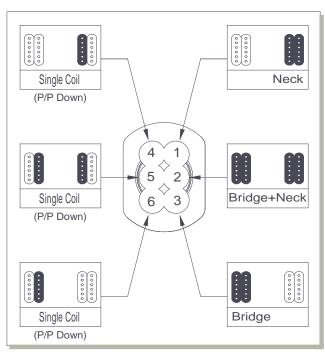

Scheme No 029: Last Updated Oct 2013

 $\circ$  $\circ$ Grd To Bridge Vol Tone (Neck) (Neck)  $\circ$  $\circ$ Ground C Solder & tape Note Vertical Orientation! Link wires Push/Pull Vol DPDT Switch 4CA O CBD B1 (Bridge) (select slug coils or screw coils in positions 4,5 & 6) Any solder points shown in between pads are meant to abridge both pads Tone (Bridge) (C) 3333 (-03 Solder & tape (use screened cable) Link wires Multi-Core Screened Cable (Tip)

Model No:- 3X3-03 Free-Way Switch

HH Coil Split + P/P Pot 2V2T